Declaration Owner

Vitra AG
Klünenfeldstrasse 22, Birsfelden, BL CH-4127, Switzerland
info@vitra.com | +41.61.377.0000 | www.vitra.com

Products

Ad Hoc High Table
Ad Hoc Round Tables
Click
Eames

Functional Unit

One complete table maintained for a 15 year period. The reference flow for the modeling system is one complete table unit

EPD Number and Period of Validity

SCS-EPD-05024
EPD Valid June 15, 2018 through June 14, 2023

Product Category Rule

Product Category Rules in Accordance with ISO 14025. Product Group: UN CPC 3812 & 3814. Other Furniture used in Offices and Other Furniture N.E.C.. Version 1.2. International EPD System. January 2018.

Program Operator

SCS Global Services
2000 Powell Street, Ste. 600, Emeryville, CA 94608
+1.510.452.8000 | www.SCSglobalServices.com

Table of Contents

Disclaimers: *This EPD conforms to ISO 14025, 14040, and ISO 14044.*

Scope of Results Reported: *The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions.*

Accuracy of Results: *Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy.*

Comparability: *The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.*

PCR review, was conducted by	The Technical Committee of the International EPD® System. Chair: Massimo Marino Contact via info@environdec.com.
Approved Date: June 15, 2018 – End Date: June 14, 2023	
Independent verification of the declaration and data, according to ISO 14025:2006	☐ internal ☑ external
Third party verifier	Tom Gloria, Ph.D., Industrial Ecology Consultants

ABOUT VITRA

Vitra is a Swiss family-owned company. It not only makes furniture and creates retail environments, but also has its own Campus with buildings by leading international architects. Creating innovative products and concepts with great designers is Vitra's essence. They are developed in Switzerland and installed worldwide by architects, companies and private users to build inspirational spaces for living, working and shopping as well as public areas. With its classics, Vitra represents groundbreaking 20th century design. Today, in combining technical and conceptual expertise with the creativity of contemporary designers, Vitra seeks to continue pushing the boundaries of the design discipline. A family business for eighty years, Vitra believes in lasting relationships with customers, employees and designers, durable products, sustainable growth and the power of good design. The Vitra Campus with buildings by some of the world's leading architects and the Vitra Design Museum with its exhibitions on design and architecture, design archives and a comprehensive furniture collection are all part of Vitra. They inspire visitors, inform the design process and create an atmosphere in which innovation flourishes.

PRODUCT DESCRIPTIONS

Ad Hoc

The Ad Hoc office furniture system was designed in collaboration with Antonio Citterio in 1994 and has been continuously updated and expanded ever since. It is both an archetype and a classic in the area of office furniture systems. The functional longevity and economic efficiency of Ad Hoc are due to its adaptability, high-quality materials and superior workmanship, as well as its timeless expression of technological elegance.

Click

The recessed folding device also allows for space-saving storage. Up to ten tables can be stacked on the trolley. Click is available in three sizes as well as in a practical set of ten tables with a stacking trolley. The Click model represented by this EPD is described in Table 1.

Eames Table

For decades, meetings and conferences have been held around the Segmented Tables designed by Charles and Ray Eames. And the relevance of these tables continues to increase as teamwork and communication play an ever greater role at work. The Eames Segmented Tables come in a variety of shapes, sizes and materials. The Eames Table represented by this EPD is described in Table 1.

The Vitra Ad Hoc, Click, and Eames tables are manufactured in an ISO 9001 and ISO 14001 production facility.

PRODUCT SPECIFICATIONS

Table 1. *Product specifications for Vitra Office Tables.*

Feature	Ad Hoc High Table	Ad Hoc Round Tables	Click	Eames
Table Type	Visitor Table	Visitor Table	Collapsible Table	Segmented Table
Work Surface Dimensions	240 x 80 cm	120 cm diameter (round)	180 x 90 cm	130 cm diameter (round)
Surface Area	1.92 m^2	1.13 m^2	1.62 m^2	1.33 m^2
Maximum Number of Occupants	8	4	4	6
Surface Height	103-108 cm	72 cm	72 cm	72.5 cm
Work Surface Options	Melamine soft light work surface	Veneer Oak *or* Melamine soft light work surface	Melamine soft light work surface	Veneer Oak *or* Melamine soft light work surface

MATERIAL COMPOSITION

Table 2. *Material composition of Vitra Office Table products. Results are shown on a mass basis (kg/unit) and as a percent of total. (*Models: *Ad Hoc (high) – Melamine; Ad Hoc (round) – Melamine; Ad Hoc (round) - Oak Veneer)*

Material Type	*Ad Hoc (high) - Melamine*	*Ad Hoc (round) - Melamine*	*Ad Hoc (round) - Oak Veneer*
Aluminum, 95% post-consumer recycled	21 30%	8.7 29%	8.7 29%
Melamine resin	0.29 0.43%	0.26 0.87%	-
Nylon	0.34 0.50%	0.25 0.83%	0.25 0.84%
Plastic	0.33 0.48%	0.26 0.88%	-
Steel	16 23%	2.4 8.0%	2.4 8.1%
Wood	31 45%	18 60%	18 62%
Zinc	0.26 0.38%	-	-
Total Product	***69***	***30***	***30***

Table 3. *Material composition of Vitra Office Table products. Results are shown on a mass basis (kg/unit) and as a percent of total.* (Models: *Eames Table – HPL; Eames Table - Oak Veneer; Click*)

Material Type	*Eames Table - HPL*	*Eames Table - Oak Veneer*	*Click*
Aluminum, 95% post-consumer recycled	7.1 18%	7.1 18%	8.9 30%
HPL	2.2 5.4%	- -	1.8 5.9%
Melamine resin	- -	- -	0.37 1.3%
Nylon	$2.4x10^{-2}$ 0.06%	$2.4x10^{-2}$ 0.06%	0.62 2.1%
Paper	- -	- -	3.0 10%
Plastic	1.0 2.5%	- -	0.68 2.3%
Rubber	$1.0x10^{-3}$ -	$1.0x10^{-3}$ -	$2.0x10^{-2}$ 0.07%
Steel	3.6 9.0%	3.6 9.0%	1.8 6.2%
Wood	26 65%	29 73%	12 42%
Total Product	***40***	***40***	**30**

Table 4. *Packaging material composition of the Vitra Office Table products. Results are shown on a mass basis and as a perfect of total. (*Models: *Ad Hoc (high) – Melamine; Ad Hoc (round) – Melamine; Ad Hoc (round) - Oak Veneer)*

Material Type	*Ad Hoc (high) - Melamine*	*Ad Hoc (round) - Melamine*	*Ad Hoc (round) - Oak Veneer*
Packaging foam	$5.0x10^{-2}$ 1.0%	$6.9x10^{-2}$ 2.9%	$6.9x10^{-2}$ 2.9%
Packaging plastic	$6.5x10^{-2}$ 1.3%	$1.0x10^{-2}$ 0.4%	$1.0x10^{-2}$ 0.4%
Corrugated	4.8 97.7%	2.3 96.6%	2.3 96.6%
Total Packaging	**4.9**	**2.3**	**2.3**

Table 5. *Packaging material composition of the Vitra Office Table products. Results are shown on a mass basis and as a perfect of total.* (Models: *Eames Table – HPL; Eames Table - Oak Veneer; Click)*

Material Type	*Eames Table - HPL*	*Eames Table - Oak Veneer*	*Click*
Packaging foam	$4.5x10^{-2}$ 1.2%	$4.5x10^{-2}$ 1.2%	- -
Packaging plastic	0.44 12%	0.44 12%	$6.6x10^{-2}$ 1.5%
Corrugated	3.2 87%	3.2 87%	4.5 99%
Total Packaging	**3.7**	**3.7**	**4.5**

LIFE CYCLE ASSESSMENT STAGES

The system boundary is cradle-to-grave and includes resource extraction and processing, product manufacture and assembly, distribution/transport, use and maintenance, and end-of-life. The diagram below illustrates the life cycle stages included in this EPD.

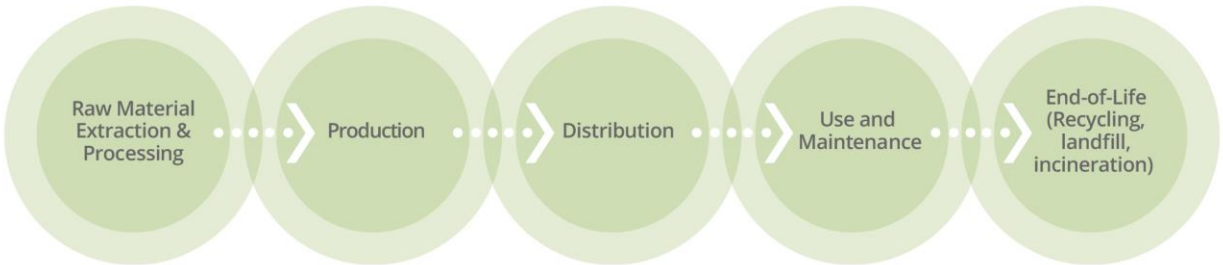

PRODUCT LIFE CYCLE FLOW DIAGRAM

The diagram below is a representation of the most significant contributions to the life cycle of Vitra office tables. This includes resource extraction, raw material processing, component manufacturing, transportation, assembly of chair, use and maintenance, and end-of-life.

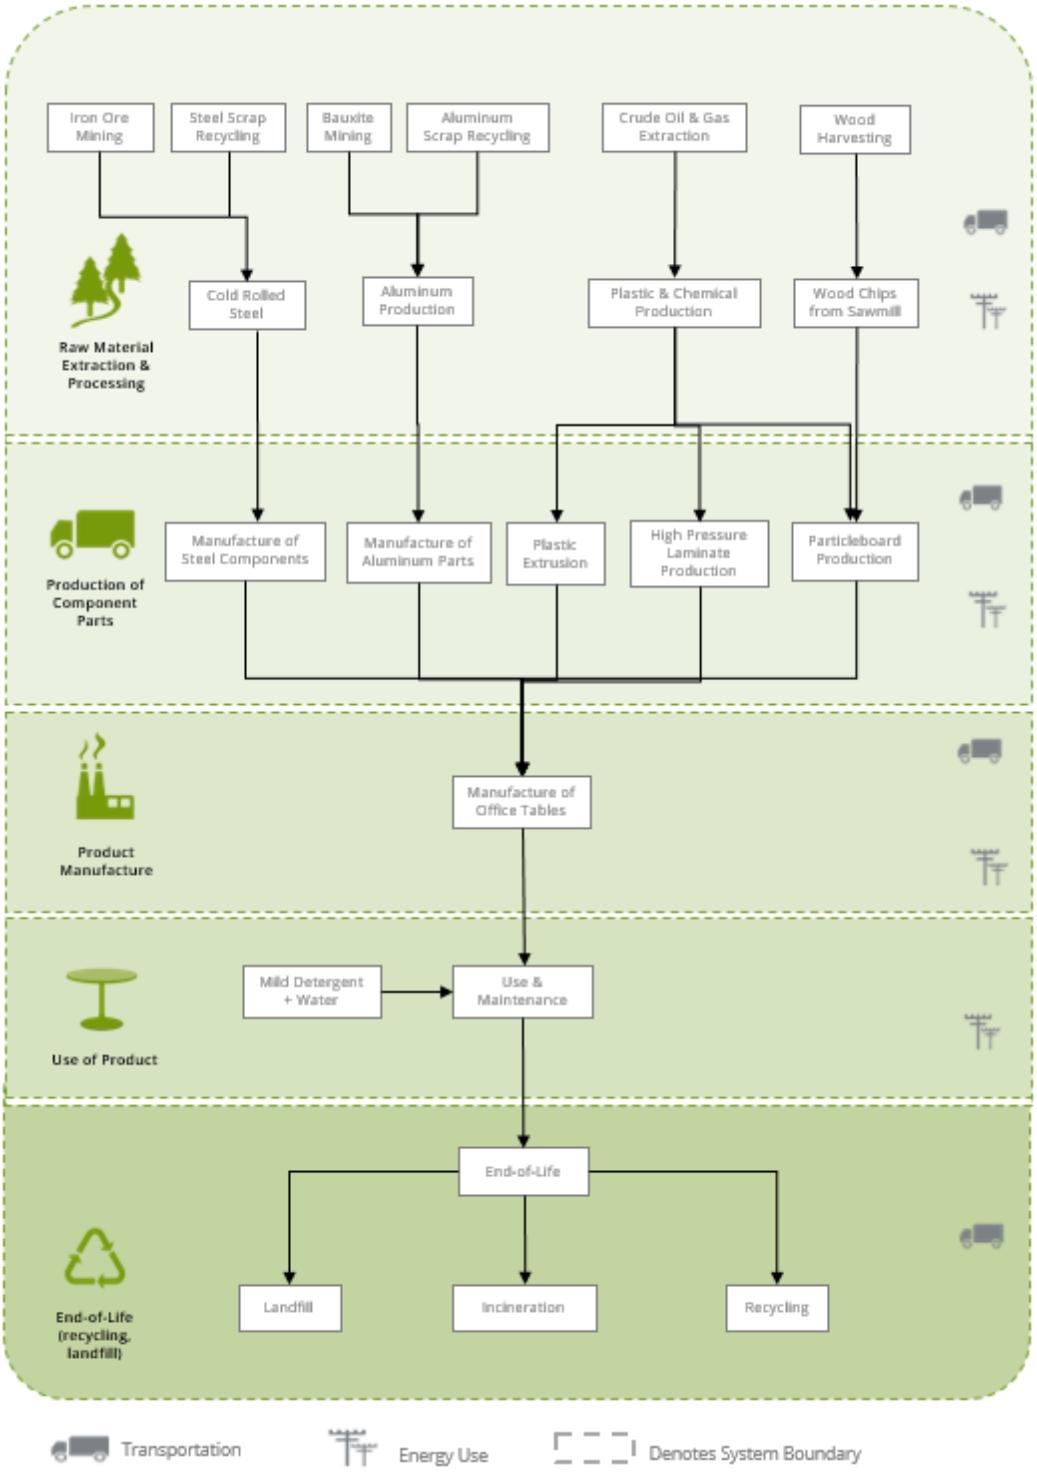

LIFE CYCLE IMPACT ASSESSMENT

Impact category indicators are calculated using the CML-IA and TRACI 2.1 characterization methods. CML-IA impact category indicators include global warming potential (100 years), acidification potential, eutrophication potential, Photochemical Ozone Creation potential, ozone depletion potential, fossil fuel abiotic resource depletion, human toxicity, and ecotoxicity, in accordance with the PCR. In addition, an estimate of the impacts from land use is reported (based on ReCiPe methodology). The global warming potential indicators do not include biogenic carbon uptake or biomass CO_2 emissions, which are reported separately for the product system in the table below.

Impact category indicator results are shown in Table 6 through Table 11, and include global warming potential (100 years), acidification potential, smog potential, ozone depletion potential, and eutrophication potential.

Table 6. *Life cycle impact assessment results for the Ad Hoc (high) – Melamine Table. Results are shown for one table product maintained over a 15 year period.*

Impact category	Unit	Total	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)
LCIA Results - TRACI					
Global warming Potential	kg CO_2 eq %	240 100%	210 85%	8.0 3.3%	28 11%
Acidification Potential	kg SO_2 eq %	1.3 100%	1.2 93%	$8.4x10^{-3}$ 0.66%	$8.2x10^{-2}$ 6.4%
Eutrophication Potential	kg N eq %	0.97 100%	0.80 82%	$4.1x10^{-2}$ 4.3%	0.13 13%
Smog Potential	kg O_3 eq %	14 100%	12 87%	0.10 0.76%	1.6 12%
Ozone depletion Potential	kg CFC-11 eq %	$1.3x10^{-5}$ 100%	$1.1x10^{-5}$ 81%	$8.0x10^{-7}$ 6.0%	$1.7x10^{-6}$ 13%
LCIA Results - CML					
Global warming (GWP100a)	kg CO_2 eq %	250 100%	210 85%	8.6 3.4%	29 12%
Acidification potential	kg SO_2 eq %	1.3 100%	1.2 94%	$8.0x10^{-3}$ 0.63%	$7.4x10^{-2}$ 5.8%
Eutrophication potential	kg PO_4^{3-} eq %	0.46 100%	0.39 84%	$1.6x10^{-2}$ 3.4%	$5.7x10^{-2}$ 12%
Photochemical oxidation	kg C_2H_4 eq %	$8.4x10^{-2}$ 100%	$7.8x10^{-2}$ 93%	$1.1x10^{-3}$ 1.4%	$5.0x10^{-3}$ 5.9%
Ozone layer depletion (ODP)	kg CFC-11 eq %	$1.3x10^{-5}$ 100%	$1.1x10^{-5}$ 81%	$8.0x10^{-7}$ 6.0%	$1.7x10^{-6}$ 13%
Abiotic depletion potential (elements)	kg Sb eq %	$2.4x10^{-3}$ 100%	$2.4x10^{-3}$ 99%	$1.5x10^{-6}$ 0.06%	$2.3x10^{-5}$ 0.95%
Abiotic depletion (fossil fuels)	MJ %	2,500 100%	2,300 91%	82 3.3%	150 6.2%
Biogenic Carbon					
Biogenic carbon emissions	kg %	35 100%	18 51%	0.61 1.8%	16 47%
Carbon uptake	kg %	38 100%	37 98%	$1.2x10^{-2}$ 0.03%	0.60 1.6%
LCIA Results - Other					
Ecotoxicity	CTUe %	12,000 100%	5,000 41%	96 0.80%	6,900 58%
Human toxicity, cancer	CTUh %	$7.3x10^{-8}$ 100%	$7.1x10^{-8}$ 97%	$2.3x10^{-11}$ 0.03%	$1.9x10^{-9}$ 2.6%
Human toxicity, non-cancer	CTUh %	$7.4x10^{-10}$ 100%	$6.5x10^{-10}$ 88%	$1.5x10^{-12}$ 0.21%	$9.1x10^{-11}$ 12%
Land occupation	species.yr %	$8.6x10^{-7}$ 100%	$8.3x10^{-7}$ 97%	$1.5x10^{-9}$ 0.18%	$2.5x10^{-8}$ 2.9%

Table 7. *Life cycle impact assessment results for the Vitra Ad Hoc (round) – Melamine Table. Results are shown for one table product maintained over a 15 year period.*

Impact category	Unit	Total	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)
LCIA Results - TRACI					
Global warming Potential	kg CO_2 eq %	94 100%	76 81%	3.5 3.7%	15 16%
Acidification Potential	kg SO_2 eq %	0.48 100%	0.44 92%	$3.7x10^{-3}$ 0.76%	$3.7x10^{-2}$ 7.7%
Eutrophication Potential	kg N eq %	0.34 100%	0.25 73%	$1.8x10^{-2}$ 5.3%	$7.4x10^{-2}$ 22%
Smog Potential	kg O_3 eq %	5.2 100%	4.5 85%	$4.5x10^{-2}$ 0.86%	0.74 14%
Ozone depletion Potential	kg CFC-11 eq %	$5.2x10^{-6}$ 100%	$4.1x10^{-6}$ 79%	$3.5x10^{-7}$ 6.7%	$7.4x10^{-7}$ 14%
LCIA Results - CML					
Global warming (GWP100a)	kg CO_2 eq %	97 100%	77 80%	3.7 3.9%	16 17%
Acidification potential	kg SO_2 eq %	0.47 100%	0.44 92%	$3.5x10^{-3}$ 0.73%	$3.3x10^{-2}$ 7.0%
Eutrophication potential	kg PO_4^{3-} eq %	0.16 100%	0.13 77%	$6.8x10^{-3}$ 4.2%	$3.2x10^{-2}$ 19%
Photochemical oxidation	kg C_2H_4 eq %	$3.0x10^{-2}$ 100%	$2.7x10^{-2}$ 90%	$4.9x10^{-4}$ 1.6%	$2.6x10^{-3}$ 8.5%
Ozone layer depletion (ODP)	kg CFC-11 eq %	$5.2x10^{-6}$ 100%	$4.1x10^{-6}$ 79%	$3.5x10^{-7}$ 6.7%	$7.4x10^{-7}$ 14%
Abiotic depletion potential (elements)	kg Sb eq %	$3.8x10^{-4}$ 100%	$3.7x10^{-4}$ 97%	$6.5x10^{-7}$ 0.17%	$1.0x10^{-5}$ 2.7%
Abiotic depletion (fossil fuels)	MJ %	950 100%	850 89%	36 3.7%	68 7.2%
Biogenic Carbon					
Biogenic carbon emissions	kg %	18 100%	8.7 47%	0.27 1.4%	9.5 51%
Carbon uptake	kg %	20 100%	20 98%	$5.3x10^{-3}$ 0.03%	0.48 2.4%
LCIA Results - Other					
Ecotoxicity	CTUe %	3,900 100%	1,600 41%	41 1.1%	2,300 58%
Human toxicity, cancer	CTUh %	$3.9x10^{-8}$ 100%	$3.8x10^{-8}$ 98%	$1.0x10^{-11}$ 0.03%	$6.1x10^{-10}$ 1.6%
Human toxicity, non-cancer	CTUh %	$3.1x10^{-10}$ 100%	$2.4x10^{-10}$ 77%	$6.6x10^{-13}$ 0.21%	$7.1x10^{-11}$ 23%
Land occupation	species.yr %	$4.4x10^{-7}$ 100%	$4.3x10^{-7}$ 96%	$6.5x10^{-10}$ 0.15%	$1.5x10^{-8}$ 3.4%

Table 8. *Life cycle impact assessment results for the Vitra Ad Hoc (round) – Oak Veneer Table. Results are shown for one table product maintained over a 15 year period.*

Impact category	Unit	Total	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)
LCIA Results - TRACI					
Global warming Potential	kg CO_2 eq %	91 100%	73 80%	3.4 3.8%	14 16%
Acidification Potential	kg SO_2 eq %	0.47 100%	0.43 91%	$3.6x10^{-3}$ 0.78%	$3.7x10^{-2}$ 7.9%
Eutrophication Potential	kg N eq %	0.33 100%	0.24 72%	$1.8x10^{-2}$ 5.3%	$7.4x10^{-2}$ 22%
Smog Potential	kg O_3 eq %	5.1 100%	4.3 85%	$4.4x10^{-2}$ 0.88%	0.73 14%
Ozone depletion Potential	kg CFC-11 eq %	$4.9x10^{-6}$ 100%	$3.8x10^{-6}$ 78%	$3.4x10^{-7}$ 7.1%	$7.4x10^{-7}$ 15%
LCIA Results - CML					
Global warming (GWP100a)	kg CO_2 eq %	93 100%	74 79%	3.7 4.0%	15 17%
Acidification potential	kg SO_2 eq %	0.46 100%	0.42 92%	$3.4x10^{-3}$ 0.75%	$3.3x10^{-2}$ 7.2%
Eutrophication potential	kg PO_4^{3-} eq %	0.16 100%	0.12 76%	$6.8x10^{-3}$ 4.2%	$3.1x10^{-2}$ 20%
Photochemical oxidation	kg C_2H_4 eq %	$2.9x10^{-2}$ 100%	$2.6x10^{-2}$ 90%	$4.9x10^{-4}$ 1.7%	$2.5x10^{-3}$ 8.7%
Ozone layer depletion (ODP)	kg CFC-11 eq %	$4.9x10^{-6}$ 100%	$3.8x10^{-6}$ 78%	$3.4x10^{-7}$ 7.0%	$7.4x10^{-7}$ 15%
Abiotic depletion potential (elements)	kg Sb eq %	$3.7x10^{-4}$ 100%	$3.6x10^{-4}$ 97%	$6.5x10^{-7}$ 0.17%	$1.0x10^{-5}$ 2.8%
Abiotic depletion (fossil fuels)	MJ %	900 100%	790 88%	35 3.9%	68 7.6%
Biogenic Carbon					
Biogenic carbon emissions	kg %	18 100%	8.6 47%	0.26 1.4%	9.4 52%
Carbon uptake	kg %	21 100%	21 98%	$5.2x10^{-3}$ 0.02%	0.48 2.3%
LCIA Results - Other					
Ecotoxicity	CTUe %	3,900 100%	1,600 42%	41 1.1%	2,200 57%
Human toxicity, cancer	CTUh %	$3.8x10^{-8}$ 100%	$3.7x10^{-8}$ 98%	$1.0x10^{-11}$ 0.03%	$6.1x10^{-10}$ 1.6%
Human toxicity, non-cancer	CTUh %	$3.1x10^{-10}$ 100%	$2.3x10^{-10}$ 77%	$6.6x10^{-13}$ 0.22%	$7.1x10^{-11}$ 23%
Land occupation	species.yr %	$4.6x10^{-7}$ 100%	$4.4x10^{-7}$ 97%	$6.4x10^{-10}$ 0.14%	$1.5x10^{-8}$ 3.2%

Table 9. *Life cycle impact assessment results for the Vitra Eames – HPL Office Table. Results are shown for one table product maintained over a 15 year period.*

Impact category	Unit	Total	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)
LCIA Results - TRACI					
Global warming Potential	kg CO_2 eq %	110 100%	83 77%	4.6 4.3%	20 18%
Acidification Potential	kg SO_2 eq %	0.50 100%	0.47 93%	$4.9x10^{-3}$ 0.98%	$2.8x10^{-2}$ 5.6%
Eutrophication Potential	kg N eq %	0.41 100%	0.28 69%	$2.4x10^{-2}$ 5.9%	0.10 25%
Smog Potential	kg O_3 eq %	5.4 100%	4.8 88%	$6.0x10^{-2}$ 1.1%	0.59 11%
Ozone depletion Potential	kg CFC-11 eq %	$6.4x10^{-6}$ 100%	$5.3x10^{-6}$ 83%	$4.7x10^{-7}$ 7.3%	$6.4x10^{-7}$ 10%
LCIA Results - CML					
Global warming (GWP100a)	kg CO_2 eq %	110 100%	84 76%	5.0 4.6%	21 19%
Acidification potential	kg SO_2 eq %	0.49 100%	0.47 94%	$4.7x10^{-3}$ 0.95%	$2.4x10^{-2}$ 4.9%
Eutrophication potential	kg PO_4^{3-} eq %	0.19 100%	0.14 74%	$9.2x10^{-3}$ 4.8%	$4.1x10^{-2}$ 21%
Photochemical oxidation	kg C_2H_4 eq %	$3.9x10^{-2}$ 100%	$3.6x10^{-2}$ 92%	$6.7x10^{-4}$ 1.7%	$2.6x10^{-3}$ 6.7%
Ozone layer depletion (ODP)	kg CFC-11 eq %	$6.4x10^{-6}$ 100%	$5.3x10^{-6}$ 83%	$4.7x10^{-7}$ 7.3%	$6.4x10^{-7}$ 10%
Abiotic depletion potential (elements)	kg Sb eq %	$4.1x10^{-4}$ 100%	$4.0x10^{-4}$ 98%	$8.8x10^{-7}$ 0.21%	$8.3x10^{-6}$ 2.0%
Abiotic depletion (fossil fuels)	MJ %	1,200 100%	1,100 91%	48 4.1%	51 4.4%
Biogenic Carbon					
Biogenic carbon emissions	kg %	30 100%	14 48%	0.36 1.2%	15 51%
Carbon uptake	kg %	32 100%	31 98%	$7.1x10^{-3}$ 0.02%	0.50 1.6%
LCIA Results - Other					
Ecotoxicity	CTUe %	5,000 100%	1,600 32%	56 1.1%	3,400 67%
Human toxicity, cancer	CTUh %	$8.6x10^{-8}$ 100%	$8.5x10^{-8}$ 99%	$1.4x10^{-11}$ 0.02%	$7.9x10^{-10}$ 0.93%
Human toxicity, non-cancer	CTUh %	$2.8x10^{-9}$ 100%	$2.7x10^{-9}$ 96%	$8.9x10^{-13}$ 0.03%	$9.8x10^{-11}$ 3.5%
Land occupation	species.yr %	$6.7x10^{-7}$ 100%	$6.6x10^{-7}$ 98%	$8.8x10^{-10}$ 0.13%	$1.3x10^{-8}$ 1.9%

Table 10. *Life cycle impact assessment results for the Eames – Oak Veneer Office Table. Results are shown for one table product maintained over a 15 year period.*

Impact category	Unit	Total	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)
LCIA Results - TRACI					
Global warming Potential	kg CO_2 eq %	95 100%	71 75%	4.6 4.9%	19 20%
Acidification Potential	kg SO_2 eq %	0.44 100%	0.41 92%	$4.9x10^{-3}$ 1.1%	$2.9x10^{-2}$ 6.5%
Eutrophication Potential	kg N eq %	0.38 100%	0.25 67%	$2.4x10^{-2}$ 6.4%	0.10 27%
Smog Potential	kg O_3 eq %	4.8 100%	4.1 86%	$6.0x10^{-2}$ 1.3%	0.60 13%
Ozone depletion Potential	kg CFC-11 eq %	$5.1x10^{-6}$ 100%	$4.1x10^{-6}$ 81%	$4.7x10^{-7}$ 9.2%	$5.1x10^{-7}$ 10%
LCIA Results - CML					
Global warming (GWP100a)	kg CO_2 eq %	98 100%	73 74%	5.0 5.1%	21 21%
Acidification potential	kg SO_2 eq %	0.43 100%	0.40 93%	$4.7x10^{-3}$ 1.1%	$2.5x10^{-2}$ 5.8%
Eutrophication potential	kg PO_4^{3-} eq %	0.18 100%	0.13 72%	$9.2x10^{-3}$ 5.2%	$4.1x10^{-2}$ 23%
Photochemical oxidation	kg C_2H_4 eq %	$3.0x10^{-2}$ 100%	$2.7x10^{-2}$ 89%	$6.7x10^{-4}$ 2.2%	$2.7x10^{-3}$ 8.8%
Ozone layer depletion (ODP)	kg CFC-11 eq %	$5.1x10^{-6}$ 100%	$4.1x10^{-6}$ 81%	$4.7x10^{-7}$ 9.2%	$5.1x10^{-7}$ 10%
Abiotic depletion potential (elements)	kg Sb eq %	$3.7x10^{-4}$ 100%	$3.6x10^{-4}$ 98%	$8.8x10^{-7}$ 0.24%	$7.2x10^{-6}$ 2.0%
Abiotic depletion (fossil fuels)	MJ %	940 100%	840 90%	48 5.1%	50 5.3%
Biogenic Carbon					
Biogenic carbon emissions	kg %	29 100%	13 43%	0.36 1.2%	16 55%
Carbon uptake	kg %	34 100%	33 99%	$7.1x10^{-3}$ 0.02%	0.49 1.4%
LCIA Results - Other					
Ecotoxicity	CTUe %	5,100 100%	1,500 30%	56 1.1%	3,500 69%
Human toxicity, cancer	CTUh %	$5.8x10^{-8}$ 100%	$5.7x10^{-8}$ 99%	$1.4x10^{-11}$ 0.02%	$6.9x10^{-10}$ 1.2%
Human toxicity, non-cancer	CTUh %	$3.3x10^{-10}$ 100%	$2.6x10^{-10}$ 79%	$8.9x10^{-13}$ 0.27%	$6.9x10^{-11}$ 21%
Land occupation	species.yr %	$6.9x10^{-7}$ 100%	$6.8x10^{-7}$ 98%	$8.8x10^{-10}$ 0.13%	$1.3x10^{-8}$ 1.9%

Table 11. *Life cycle impact assessment results for the Click foldable table. Results are shown for one table product maintained over a 15 year period.*

Impact category	Unit	Total	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)
LCIA Results - TRACI					
Global warming Potential	kg CO_2 eq %	120 100%	99 82%	3.4 2.8%	19 16%
Acidification Potential	kg SO_2 eq %	0.59 100%	0.52 88%	$3.6x10^{-3}$ 0.62%	$6.4x10^{-2}$ 11%
Eutrophication Potential	kg N eq %	0.40 100%	0.30 75%	$1.8x10^{-2}$ 4.4%	$8.2x10^{-2}$ 21%
Smog Potential	kg O_3 eq %	6.5 100%	5.3 81%	$4.5x10^{-2}$ 0.69%	1.2 18%
Ozone depletion Potential	kg CFC-11 eq %	$1.3x10^{-4}$ 100%	$1.2x10^{-4}$ 99%	$3.5x10^{-7}$ 0.27%	$1.2x10^{-6}$ 0.95%
LCIA Results - CML					
Global warming (GWP100a)	kg CO_2 eq %	120 100%	100 81%	3.7 3.0%	20 16%
Acidification potential	kg SO_2 eq %	0.58 100%	0.52 89%	$3.5x10^{-3}$ 0.60%	$5.9x10^{-2}$ 10%
Eutrophication potential	kg PO_4^{3-} eq %	0.20 100%	0.15 78%	$6.8x10^{-3}$ 3.4%	$3.6x10^{-2}$ 19%
Photochemical oxidation	kg C_2H_4 eq %	$4.0x10^{-2}$ 100%	$3.6x10^{-2}$ 89%	$4.9x10^{-4}$ 1.2%	$3.9x10^{-3}$ 9.6%
Ozone layer depletion (ODP)	kg CFC-11 eq %	$1.3x10^{-4}$ 100%	$1.2x10^{-4}$ 99%	$3.5x10^{-7}$ 0.27%	$1.2x10^{-6}$ 0.95%
Abiotic depletion potential (elements)	kg Sb eq %	$4.3x10^{-4}$ 100%	$4.2x10^{-4}$ 96%	$6.5x10^{-7}$ 0.15%	$1.5x10^{-5}$ 3.6%
Abiotic depletion (fossil fuels)	MJ %	1,300 100%	1,100 89%	35 2.8%	110 8.5%
Biogenic Carbon					
Biogenic carbon emissions	kg %	24 100%	13 53%	0.26 1.1%	11 45%
Carbon uptake	kg %	28 100%	27 98%	$5.2x10^{-3}$ 0.02%	0.50 1.8%
LCIA Results - Other					
Ecotoxicity	CTUe %	3,600 100%	1,700 47%	41 1.1%	1,900 52%
Human toxicity, cancer	CTUh %	$5.2x10^{-8}$ 100%	$5.1x10^{-8}$ 99%	$1.0x10^{-11}$ 0.02%	$6.9x10^{-10}$ 1.3%
Human toxicity, non-cancer	CTUh %	$8.1x10^{-9}$ 100%	$8.1x10^{-9}$ 99%	$6.6x10^{-13}$ 0.01%	$7.8x10^{-11}$ 0.96%
Land occupation	species.yr %	$6.1x10^{-7}$ 100%	$5.9x10^{-7}$ 97%	$6.5x10^{-10}$ 0.11%	$1.9x10^{-8}$ 3.1%

Resource Use

The PCR requires that several parameters be reported in the EPD, including resource use, waste categories and output flows, and other environmental information. The results for these parameters per declared unit presented below

Table 12. *Life cycle impact assessment results for the Ad Hoc (high) – Melamine Table Results are shown for one table product maintained over a 15 year period.*

Indicator	Units	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)	Total
Resources					
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ %	640 100%	600 93%	38 5.9%	8.7 1.4%
Use of renewable primary energy resources used as raw materials	MJ %	610 100%	610 100%	0.0 0.00%	0.0 0.00%
Total use of renewable primary energy resources	MJ. %	1,300 100%	1,200 96%	38 3.0%	8.7 0.70%
Use of nonrenewable primary energy excluding nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Use of nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Total use of nonrenewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ %	2,700 100%	2,400 91%	84 3.1%	170 6.2%
Use of secondary materials	kg %	38 100%	38 100%	0.0 0.00%	0.0 0.00%
Use of renewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Use of nonrenewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Net use of fresh water	kg %	11 100%	11 96%	$7.3x10^{-2}$ 0.65%	0.33 2.9%
Wastes					
Non-hazardous waste disposed	kg %	30 46%	5.8 9.0%	29 45%	30 46%
Hazardous waste disposed	kg %	$9.1x10^{-3}$ 98%	$8.3x10^{-5}$ 0.89%	$1.4x10^{-4}$ 1.5%	$9.1x10^{-3}$ 98%
Radioactive waste disposed	kg %	$5.4x10^{-3}$ 83%	$3.7x10^{-5}$ 0.58%	$1.0x10^{-3}$ 16%	$5.4x10^{-3}$ 83%
Components for re-use	kg	0.0	0.0	0.0	0.0
Materials for recycling	kg	Negligible	Negligible	Negligible	Negligible
Materials for energy recovery	kg	Negligible	Negligible	Negligible	Negligible
Exported energy	MJ	Negligible	Negligible	Negligible	Negligible
Use of renewable material resources	kg %	31 100%	31 100%	0.0 0.00%	0.0 0.00%

INA = Indicator Not Assessed

Table 13. *Life cycle impact assessment results for the Ad Hoc (round) – Melamine Table Results are shown for one table product maintained over a 15 year period.*

Indicator	Units	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)	Total
Resources					
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ %	310 100%	290 93%	16 5.3%	4.9 1.6%
Use of renewable primary energy resources used as raw materials	MJ %	350 100%	350 100%	0.0 0.00%	0.0 0.00%
Total use of renewable primary energy resources	MJ. %	660 100%	640 97%	16 2.5%	4.9 0.74%
Use of nonrenewable primary energy excluding nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Use of nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Total use of nonrenewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ %	1,000 100%	910 89%	36 3.5%	72 7.1%
Use of secondary materials	kg %	16 100%	16 100%	0.0 0.00%	0.0 0.00%
Use of renewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Use of nonrenewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Net use of fresh water	kg %	4.3 100%	4.1 96%	$3.2x10^{-2}$ 0.73%	0.16 3.7%
Wastes					
Non-hazardous waste disposed	kg %	25 100%	9.2 36%	2.5 9.9%	14 54%
Hazardous waste disposed	kg %	$3.1x10^{-3}$ 100%	$3.0x10^{-3}$ 97%	$3.6x10^{-5}$ 1.2%	$6.5x10^{-5}$ 2.1%
Radioactive waste disposed	kg %	$2.5x10^{-3}$ 100%	$2.0x10^{-3}$ 82%	$1.6x10^{-5}$ 0.66%	$4.3x10^{-4}$ 17%
Components for re-use	kg	0.0	0.0	0.0	0.0
Materials for recycling	kg	Negligible	Negligible	Negligible	Negligible
Materials for energy recovery	kg	Negligible	Negligible	Negligible	Negligible
Exported energy	MJ	Negligible	Negligible	Negligible	Negligible
Use of renewable material resources	kg %	18 100%	18 100%	0.0 0.00%	0.0 0.00%

INA = Indicator Not Assessed

Table 14. *Life cycle impact assessment results for the Ad Hoc (round) – Oak Veneer Table Results are shown for one table product maintained over a 15 year period.*

Indicator	Units	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)	Total
Resources					
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ %	320 100%	300 93%	16 5.1%	4.9 1.5%
Use of renewable primary energy resources used as raw materials	MJ %	360 100%	360 100%	0.0 0.00%	0.0 0.00%
Total use of renewable primary energy resources	MJ. %	680 100%	660 97%	16 2.4%	4.9 0.72%
Use of nonrenewable primary energy excluding nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Use of nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Total use of nonrenewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ %	960 100%	850 89%	36 3.7%	72 7.5%
Use of secondary materials	kg %	15 100%	15 100%	0.0 0.00%	0.0 0.00%
Use of renewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Use of nonrenewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Net use of fresh water	kg %	4.0 100%	3.8 95%	$3.1x10^{-2}$ 0.78%	0.16 3.9%
Wastes					
Non-hazardous waste disposed	kg %	25 100%	8.9 36%	2.5 10.0%	13 54%
Hazardous waste disposed	kg %	$3.0x10^{-3}$ 100%	$2.9x10^{-3}$ 97%	$3.6x10^{-5}$ 1.2%	$6.4x10^{-5}$ 2.1%
Radioactive waste disposed	kg %	$2.3x10^{-3}$ 100%	$1.9x10^{-3}$ 81%	$1.6x10^{-5}$ 0.69%	$4.2x10^{-4}$ 18%
Components for re-use	kg	-	-	-	-
Materials for recycling	kg	Negligible	Negligible	Negligible	Negligible
Materials for energy recovery	kg	Negligible	Negligible	Negligible	Negligible
Exported energy	MJ	Negligible	Negligible	Negligible	Negligible
Use of renewable material resources	kg %	18 100%	18 100%	0.0 0.00%	0.0 0.00%

INA = Indicator Not Assessed

Table 15. *Life cycle impact assessment results for the Vitra Eames – HPL Office Table. Results are shown for one table product maintained over a 15 year period.*

Indicator	Units	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)	Total
Resources					
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	450	420	22	5.4
	%	100%	94%	5.0%	1.2%
Use of renewable primary energy resources used as raw materials	MJ	510	510	0.0	0.0
	%	100%	100%	0.00%	0.00%
Total use of renewable primary energy resources	MJ.	960	930	22	5.4
	%	100%	97%	2.3%	0.56%
Use of nonrenewable primary energy excluding nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Use of nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Total use of nonrenewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1,300	1,200	49	56
	%	100%	92%	3.9%	4.4%
Use of secondary materials	kg	18	18	0.0	0.0
	%	100%	100%	0.00%	0.00%
Use of renewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Use of nonrenewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Net use of fresh water	kg	5.8	5.5	$4.2x10^{-2}$	0.20
	%	100%	96%	0.73%	3.5%
Wastes					
Non-hazardous waste disposed	kg	29	10	3.4	16
	%	100%	35%	11%	53%
Hazardous waste disposed	kg	$3.1x10^{-3}$	$2.9x10^{-3}$	$4.8x10^{-5}$	$7.6x10^{-5}$
	%	100%	96%	1.6%	2.5%
Radioactive waste disposed	kg	$2.8x10^{-3}$	$2.5x10^{-3}$	$2.2x10^{-5}$	$3.0x10^{-4}$
	%	100%	89%	0.78%	11%
Components for re-use	kg	0.0	0.0	0.0	0.0
Materials for recycling	kg	Negligible	Negligible	Negligible	Negligible
Materials for energy recovery	kg	Negligible	Negligible	Negligible	Negligible
Exported energy	MJ	Negligible	Negligible	Negligible	Negligible
Use of renewable material resources	kg	26	26	0.0	0.0
	%	100%	100%	0.00%	0.00%

INA = Indicator Not Assessed

Table 16. *Life cycle impact assessment results for the Eames – Oak Veneer Office Table. Results are shown for one table product maintained over a 15 year period.*

Indicator	Units	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)	Total
Resources					
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ %	460 100%	430 94%	22 4.8%	5.1 1.1%
Use of renewable primary energy resources used as raw materials	MJ %	580 100%	580 100%	0.0 0.00%	0.0 0.00%
Total use of renewable primary energy resources	MJ. %	1,000 100%	1,000 97%	22 2.1%	5.1 0.49%
Use of nonrenewable primary energy excluding nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Use of nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Total use of nonrenewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ %	1,000 100%	910 90%	49 4.8%	54 5.3%
Use of secondary materials	kg %	18 100%	18 100%	0.0 0.00%	0.0 0.00%
Use of renewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Use of nonrenewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Net use of fresh water	kg %	4.3 100%	4.1 95%	$4.2x10^{-2}$ 0.99%	0.17 4.1%
Wastes					
Non-hazardous waste disposed	kg %	28 100%	9.4 33%	3.4 12%	16 55%
Hazardous waste disposed	kg %	$2.9x10^{-3}$ 100%	$2.7x10^{-3}$ 96%	$4.8x10^{-5}$ 1.7%	$6.5x10^{-5}$ 2.3%
Radioactive waste disposed	kg %	$2.4x10^{-3}$ 100%	$2.0x10^{-3}$ 86%	$2.2x10^{-5}$ 0.92%	$3.0x10^{-4}$ 13%
Components for re-use	kg	0.0	0.0	0.0	0.0
Materials for recycling	kg	Negligible	Negligible	Negligible	Negligible
Materials for energy recovery	kg	Negligible	Negligible	Negligible	Negligible
Exported energy	MJ	Negligible	Negligible	Negligible	Negligible
Use of renewable material resources	kg %	29 100%	29 100%	0.0 0.00%	0.0 0.00%

INA = Indicator Not Assessed

Table 17. *Life cycle impact assessment results for the Click foldable table. Results are shown for one table product maintained over a 15 year period.*

Indicator	Units	Raw Material Extraction & Processing (Upstream Module)	Production (Core Module)	Distribution, Use & End-of-Life (Downstream Module)	Total
Resources					
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	390	370	16	5.5
	%	100%	94%	4.2%	1.4%
Use of renewable primary energy resources used as raw materials	MJ	250	250	0.0	0.0
	%	100%	100%	0.00%	0.00%
Total use of renewable primary energy resources	MJ.	640	610	16	5.5
	%	100%	97%	2.6%	0.87%
Use of nonrenewable primary energy excluding nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Use of nonrenewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA
Total use of nonrenewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1,400	1,200	36	110
	%	100%	89%	2.6%	8.3%
Use of secondary materials	kg	12	12	0.0	0.0
	%	100%	100%	0.00%	0.00%
Use of renewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Use of nonrenewable secondary fuels	MJ	Negligible	Negligible	Negligible	Negligible
Net use of fresh water	kg	5.5	5.3	$3.1x10^{-2}$	0.19
	%	100%	96%	0.57%	3.5%
Wastes					
Non-hazardous waste disposed	kg	29	11	2.5	15
	%	100%	39%	8.6%	53%
Hazardous waste disposed	kg	$3.3x10^{-3}$	$3.2x10^{-3}$	$3.6x10^{-5}$	$8.7x10^{-5}$
	%	100%	96%	1.1%	2.6%
Radioactive waste disposed	kg	$3.2x10^{-3}$	$2.5x10^{-3}$	$1.6x10^{-5}$	$6.8x10^{-4}$
	%	100%	79%	0.49%	21%
Components for re-use	kg	0.0	0.0	0.0	0.0
Materials for recycling	kg	Negligible	Negligible	Negligible	Negligible
Materials for energy recovery	kg	Negligible	Negligible	Negligible	Negligible
Exported energy	MJ	Negligible	Negligible	Negligible	Negligible
Use of renewable material resources	kg	12	12	0.0	0.0
	%	100%	100%	0.00%	0.00%

INA = Indicator Not Assessed

ADDITIONAL ENVIRONMENTAL INFORMATION

Vitra Ad Hoc and Click tables are GREENGUARD Indoor Air Quality Certified

.

SUPPORTING TECHNICAL INFORMATION

Unit processes are developed with SimaPro 8.3 software, drawing upon data from multiple sources. Primary data were provided by Vitra for their manufacturing processes. The primary sources of secondary LCI data are from the Ecoinvent Database.

Table 18. Data sources used for the LCA study.

Component	Material Classification	Material Dataset	Processing Dataset	Data Source & Publication Date
Product Materials				
ABS	Plastic	Acrylonitrile-butadiene-styrene copolymer {GLO}| market for	Included in dataset	EI v3.3; 2016
Aluminum, 95% post-recycled	Aluminum	Aluminium scrap, post-consumer {GLO} | market for; Aluminium, primary, ingot {RoW} | market for	Metal working, average for aluminium product manufacturing {GLO}| market for	EI v3.3; 2016
Honeycomb cardboard	Paper	Corrugated board box {GLO}| market for corrugated board box	Included in dataset	EI v3.3; 2016
EPDM	Rubber	Synthetic rubber {GLO}| market for	Injection moulding {GLO}| market for	EI v3.3; 2016
HDF	Wood	Fibreboard, hard (892 kg/m3)	Included in dataset	EI v3.3; 2016
HPL	HPL	High pressure laminate (HPL)	Included in dataset	EI v3.3; 2016
Melamine resin	Melamine resin	Melamine {GLO}| market for	Injection moulding {GLO}| market for	EI v3.3; 2016
Oak Wood; Particle board	Wood	Sawnwood, board, hardwood , dried (u=20%), planed {GLO} | market for; Particle board, for indoor use {RER} | production	Included in dataset	EI v3.3; 2016
Polyamides	Plastic	Nylon 6 {GLO} | market for; ylon 6-6 {GLO} | market for; Nylon 6, glass-filled {GLO} | market for; Nylon 6-6, glass-filled {GLO} | market for	Injection moulding {GLO}| market for	EI v3.3; 2016
PVC	Plastic	Polyvinylchloride, bulk polymerised {GLO}| market for	Injection moulding {GLO}| market for	EI v3.3; 2016
Steel	Steel	Steel, low-alloyed {GLO}| market for	Metal working, average for steel product manufacturing {GLO}|market	EI v3.3; 2016
Zamak	Zinc	Zinc {GLO}| market for; Aluminium, primary, ingot {IAI Area, EU27 & EFTA}| market for; Copper {RER}| production, primary; Magnesium {GLO}| market for	Metal working, average for metal product manufacturing {GLO}| market for	EI v3.3; 2016
Manufacturing				
Electricity	Regional electricity grid mix	Electricity, medium voltage, hydro {DE}| market for	n/a	EI v3.3; 2016 SCS; 2018
Heat	Natural gas	Natural gas, high pressure {DE}| market for	n/a	EI v3.3; 2016
Combustion	Light fuel oil	Light fuel oil {Europe without Switzerland}| market for	n/a	EI v3.3; 2016
Packaging				
Packaging	Packaging foam; Packaging film	Polyurethane, flexible foam {RER}| production; Packaging film, low density polyethylene {RER}| production	Included in dataset	EI v3.3; 2016
Packaging	Corrugated board	Corrugated board box {RER}| production	Included in dataset	EI v3.3; 2016
Packaging	Wood	Sawnwood, board, hardwood , dried (u=20%), planed {GLO} | market for	Included in dataset	EI v3.3; 2016
Transportation				
Road transport	Diesel Truck	Transport, freight, lorry 16-32 metric ton, EURO4 {GLO}| market for	n/a	EI v3.3; 2016
Rail transport	Rail freight	Transport, freight train {Europe without Switzerland}| market for	n/a	EI v3.3; 2016
Ship transport	Transoceanic	Transport, freight, sea, transoceanic ship{GLO}	n/a	EI v3.3; 2016

Data Quality

Data Quality Parameter	Data Quality Discussion
Time-Related Coverage: Age of data and the minimum length of time over which data is collected	The most recent available data are used, based on other considerations such as data quality and similarity to the actual operations. Typically, these data are less than 10 years old (typically 2016). All of the secondary data used represented an average of at least one year's worth of data collection, and up to three years in some cases. Manufacturer-supplied data (primary data) are based on annual production for 2017 and engineering estimates.
Geographical Coverage: Geographical area from which data for unit processes is collected to satisfy the goal of the study	The data used in the analysis provide the best possible representation available with current data. Electricity use for product manufacture is modeled using representative data for hydroelectricity. Surrogate data used in the assessment are representative of European or global operations. Data representative of global operations are considered sufficiently similar to actual processes. Data representing product disposal are based on European and US statistics.
Technology Coverage: Specific technology or technology mix	For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations. Representative datasets are used to represent the actual processes, as appropriate.
Precision: Measure of the variability of the data values for each data expressed	Precision of results are not quantified due to a lack of data. Secondary data for operations are typically averaged for one or more years and over multiple operations, which is expected to reduce the variability of results.
Completeness: Percentage of flow that is measured or estimated	The LCA model included all known mass and energy flows for production of the products. In some instances, surrogate data used to represent upstream and downstream operations may be missing some data which is propagated in the model. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded. In total, these missing data represent less than 5% of the mass or energy flows.
Representativeness: Qualitative assessment of the degree to which the data set reflects the true population of interest	Data used in the assessment represent typical or average processes as currently reported from multiple data sources, and are therefore generally representative of the range of actual processes and technologies for production of these materials. Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed data collection throughout the supply chain back to resource extraction.
Consistency: Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis	The consistency of the assessment is considered to be high. Data sources of similar quality and age are used; with a bias towards Ecoinvent v3.3 data where available. Different portions of the product life cycle are equally considered; however, it must be noted that final disposition of the product is based on assumptions of current average practices in the United States.
Reproducibility: Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study	Based on the description of data and assumptions used, this assessment would be reproducible by other practitioners. All assumptions, models, and data sources are documented.
Sources of the Data: Description of all primary and secondary data sources	Data representing energy use at Vitra's Neuenburg, Germany facility represent an annual average and are considered of medium to high quality due to the length of time over which these data are collected for the existing production processes. For secondary LCI datasets, Ecoinvent v3.3 LCI data are used.
Uncertainty of the Information: Uncertainty related to data, models, and assumptions	Uncertainty related to materials in the products and packaging is low. Actual supplier data for upstream operations was not available and the study relied upon the use of existing representative datasets. These datasets contained relatively recent data (<10 years), but lacked geographical representativeness. Uncertainty related to the impact assessment methods used in the study are high. The impact assessment method required by the PCR includes impact potentials, which lack characterization of providing and receiving environments or tipping points.

Allocation

Resource use at the Neuenburg, Germany facility (e.g., water and energy) was allocated to the product based on the unit mass as a fraction of the total facility production volume.

The Vitra products include recycled materials, which are allocated using the recycled content allocation method (also known as the 100-0 cut off method). Using the recycled content allocation approach, system inputs with recycled content do not receive any burden from the previous life cycle other than reprocessing of the waste material. At end of life, materials which are recycled leave the system boundaries with no additional burden.

Impacts from transportation were allocated based on the mass of material and distance transported.

System Boundaries

The system boundary of the life cycle assessment for the Vitra office tables was cradle-to-grave. A description of the system boundaries for this study is as follows:

- ***Upstream - Raw Material Extraction and Processing –*** This stage includes extraction of virgin materials and reclamation of non-virgin feedstock. This includes the extraction of all raw materials, including the transport to the manufacturing site. Resource use and emissions associated with both the extraction of the raw materials used in the products, as well as those associated with the processing of raw materials and table component manufacturing and the production of the product packaging materials, are included in this stage. Impacts associated with the transport of the processed raw materials to the manufacturing facility (upstream transport) are also included in this stage.
- ***Core - Production stage –*** This stage includes all the relevant manufacturing processes and flows, excluding production of capital goods, infrastructure, production of manufacturing equipment, and personnel-related activities. This stage includes the impacts from energy use and emissions associated with the processes occurring at the Neuenbürg, Germany facility.
- ***Downstream***
    - *Distribution, Storage and Use stage* – This stage includes the delivery of the products to the point of use (downstream transportation), storage and maintenance of the furniture product for a period of 15 years.
    - *Disposal stage* **–** The end-of-life stage includes transport of the product to material reclamation or waste treatment facilities. Emissions from disposal of product components in a landfill or from incineration are included. Packaging disposal is also included in this phase.

Cut-off criteria

According to the PCR, cumulative omitted mass or energy flows within the product boundary shall not exceed 5%. In the present study, except as noted, all known materials and processes were included in the life cycle inventory.

REFERENCES

1. Ecoinvent Centre (2016) Ecoinvent data from v3.3. Swiss Center for Life Cycle Inventories, Dübendorf, 2016, http://www.ecoinvent.org
2. CML-IA Characterization Factors. Institute of Environmental Sciences. Leiden University. Netherlands.
3. ISO 14025: 2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures
4. ISO 14040: 2006 Environmental Management – Life cycle assessment – Principles and framework
5. ISO 14044: 2006 Environmental Management – Life cycle assessment – Requirements and Guidelines
6. Product Category Rules in Accordance with ISO 14025. Product Group: UN CPC 3812 & 3814. Other Furniture used in Offices and Other Furniture N.E.C.. Version 1.2. International EPD System. 2018.
7. SCS Global Services. Life Cycle Assessment of Vitra Office tables. June 2018. Final Report. Prepared for Vitra AG.
8. SCS Type III Environmental Declaration Program: Program Operator Manual v9.0. January 2018. SCS Global Services
9. Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI). Version 2.1. US Environmental Production Agency.
10. US EPA. Advancing Sustainable Materials Management: 2014 Fact Sheet. Assessing Trends in Material Generation, Recycling and Disposal in the United States. November 2015. https://www.epa.gov/sites/production/files/2016-11/documents/2014_smmfactsheet_508.pdf
11. US EPA. WARM Model Transportation Research - Draft. Memorandum from ICF Consulting to United States Environmental Protection Agency. September 7, 2004. http://epa.gov/epawaste/conserve/tools/warm/SWMGHGreport.html#background

For more information contact:

Vitra AG
Klünenfeldstrasse 22, Birsfelden, BL CH-4127, Switzerland
info@vitra.com | +41.61.377.0000 | www.vitra.com

SCS Global Services
2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA
Main +1.510.452.8000 | fax +1.510.452.8001